



NEW Large Capacity Ink System (LCIS)

NEW New Air Flow and Large Heater

NEW High-speed and Reliable Print Heads

DDP - Dynamic Dot Printing Technology

NEW On-Carriage Ionizer

Enhanced SNM2 - Smart Nozzle Mapping

Enhanced SP4 - Smart Pass Technology

NEW Take-up System with Slide Mechanism

NEW Media Lifter

NEW Automatic Print Adjustment


Enhanced Advanced CP_Manager Software

High Speed Eco Solvent Printer

Color Painter™ M-64s

- LCIS Model -

High Outdoor Durability

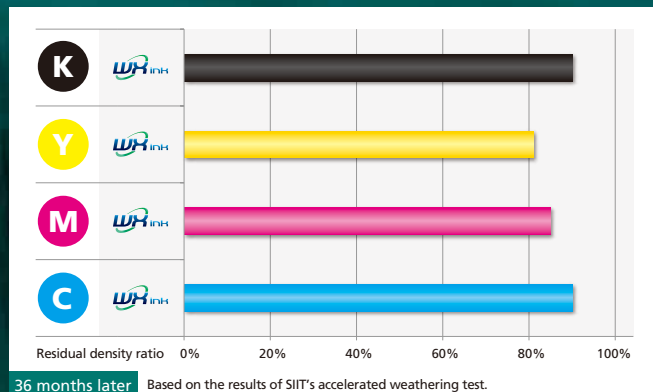

Even with its low odor characteristic, WX inks boast excellent outdoor durability.
 * SIIT does not guarantee outdoor durability.

High Density



The WX inks achieve high-density colors and details in dark areas. The M-64s meets customers' needs for sharp, clear and bright backlit signs.



Enlarged image of high density area



High Speed Eco Solvent Printer

NEW Color Painter™ M-64s

- L C I S Model -

Low
Odor

High
Quality

Utmost Balance

High
Speed



Large Capacity Ink System

Seiko I Infotech Inc.



High Speed Eco Solvent Printer

ColorPainter™ M-64s

- LCIS Model -

IP-6620 (ColorPainter M-64s LCIS model)

Print Head	High Frequency drop on demand piezo
Number of Nozzles	508 nozzles/head
Maximum Resolution	900 dpi
Maximum Media Width	1,626 mm (64")
Maximum Print Width	1,616 mm (63.6")
Printing Speed	3.5 to 49.7 smph (38 to 535 sfph)
Media Weight	Up to 50 kg (110 lbs)
Maximum Media Diameter	220 mm (8.7")
Margin Size	5 mm (1/5") on each edge (with rolled media, without edge guards)
Ink Type	Low-Odor and Eco Solvent: WX
Color	6 (C, M, Y, K, Lc, Lm)
Ink Bottle Capacity	1 liter per color (2 bottles/box)
Ink Reservoir Capacity	Maximum 4.5 liters/color
Media	PVC, Banner and other media designed for solvent printers.
Heater	3-way built-in heaters (Pre, Print, After)
Take-up Modes	Loose/Outer, Tension/Inner, Tension/Outer
Interface	USB 2.0
Power Source	200 to 240 VAC, 12A, 50Hz/60Hz
Power Consumption	2,880W or less
Operating Environment	15 - 30 °C (59 - 86 °F), 30 - 70 % RH (no condensation)
Storage Environment	5 - 35 °C (41 - 95 °F), 10 - 80 % RH (no condensation)
External Dimensions	3,327(W) x 935(D) x 1247(H) mm (131" x 37" x 49")
Weight	360 kg (794 lbs) or less without media and inks

Option

IP6-010	Cutter unit (64")
IP7-013	Exhaust Attachment
IP5-261	2" flange

Consumables

IP6-241	WX Ink Yellow (2 bottles/set)
IP6-242	WX Ink Magenta (2 bottles/set)
IP6-243	WX Ink Cyan (2 bottles/set)
IP6-244	WX Ink Black (2 bottles/set)
IP6-245	WX Ink Light cyan (2 bottles/set)
IP6-246	WX Ink Light magenta (2 bottles/set)



ONYX RIPCenter

Basic Printer Queue, Consistent Performance



The ColorPainter M-64s comes with ONYX RIP Center SIIT Edition featuring an easy-to-use intuitive interface. ONYX RIP Center helps you produce consistent high-quality prints from the first day of installation.

Recommended system configuration

- Windows® XP Professional 32bit or 64bit
- Windows® Vista Business / Enterprise 32bit or 64bit
- Windows® 7 Professional / Enterprise / Ultimate 32bit or 64bit
- Windows® 8 Professional / Enterprise 32bit or 64bit

*Fast. Precise. Reliable.*

Focusing on "Time", Seiko I Infotech Inc. has been dedicated to pursuing the ideal for wide format printers for sign and graphics professionals. "Color On Time" represents our credo for "Manufacturing" with "Fast", "Precise" and "Reliable" as the three key elements. We strive to develop and manufacture products and services that benefit customers' "Time".

SUPPORT

Seiko I Infotech provides customer service through its worldwide distributor network.

Specifications are subject to change without notice. Please contact your local authorized SIIT product distributor. ColorPainter is a trademark of Seiko I Infotech Inc. All other trademarks are the property of their respective owners.

SII



Seiko I Infotech Inc.

Headquarters

8, Nakase 1-chome, Mihama-ku, Chiba-shi, Chiba 261-8507, Japan

Telephone: +81-43-211-1363

Takatsuka Office

563, Takatsukashinden, Matsudo-shi, Chiba 270-2222, Japan

Telephone: +81-47-392-2082

SEIKO

SEIKO HOLDINGS GROUP

INFORMATION <http://www.seiko-i.com>